

JUST daylight 5000 proGraphic | 15 W

fluorescent lamp, 15 Watt, 438 mm, 5000 Kelvin

Product benefits

- corresponding to ISO 3664 (when used in appropriate fixtures)
- minimal deviation of colour coordinates
- Low metamerism index; quality class in accordance with CIE 51.2: BC or better
- Measurement reports according to all requirements
- suitable for conventional and electronic starter device technology
- dimmable

Fields of application


- Visual matching of coloured surfaces, prints hardcopy & softcopy proofs
- Quality inspection & assurance
- Graphical & print industry, photographers, advertising agencies

Colorimetric properties

Color rendering indices	
Ra	>93
Metamerism indices	
Mi _{vis}	<1
Mi _{uv}	<1,5
Photometric data	
CCT	5000
Chromaticity Error	<0.005
CIE 1964 10° average viewer	
x	0.3478
y	0.3595

Technical data

Electrical data	
Rated wattage	15 W
Energy efficiency class	B
Energy consumption	19 kWh / 1000 h
Luminous efficacy	50 lm/Watt
Nominal luminous flux	750 lm
Light colour EN12464-1	Daylight 5000
Additional product details	
Bases	G13 (T8)
Mercury content	< 3,5 mg
Appropriate disposal according to WEEE	Yes
Nominal lifespan	20.000 h
Operating life	2.500 h
Weights and measures	
Lamp diameter (d)	26 mm
Length with bases (excl. base pins) (l)	438 mm
Weight	55,0 g

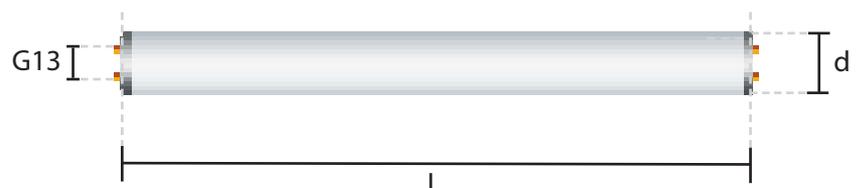

mW/m²/nm

