

# JUST daylight 6500 proIndustry | 58 W

fluorescent lamp, 58 Watt, 1500 mm, 6500 Kelvin

## Product benefits

- corresponding to ISO 3668 (when used in appropriate fixtures)
- minimal deviation of colour coordinates
- Low metamerism index; quality class in accordance with CIE 51.2: BC or better
- Measurement reports according to all requirements
- suitable for conventional and electronic starter device technology
- dimmable

## Fields of application

- Visual matching of coloured materials, surfaces, and finishes
- Quality inspection & assurance
- Automotive, furniture, paints, coatings, plastics, textiles & fabrics, ceramics, food & agriculture

## Colormetric properties

### Color rendering indices

Ra	>95
----	-----

### Metamerism indices

Mi <sub>vis</sub>	<1
Mi <sub>uv</sub>	<1,5

### Photometric data

CCT	6500
Chromaticity Error	<0.003

### CIE 1964 10° average viewer

x	0.3138
y	0.3309

## Technical data

### Electrical data


Rated wattage	58 W
Energy efficiency class	B
Energy consumption	68 kWh / 1000 h
Luminous efficacy	64 lm/Watt
Nominal luminous flux	3700 lm
Light colour EN12464-1	Daylight 6500

### Additional product details

Bases	G13 (T8)
Mercury content	< 3,5 mg
Appropriate disposal according to WEEE	Yes
Nominal lifespan	20.000 h
Operating life	2.500 h

### Weights and measures

Lamp diameter (d)	26 mm
Length with bases (excl. base pins) (l)	1500 mm
Weight	167,0 g

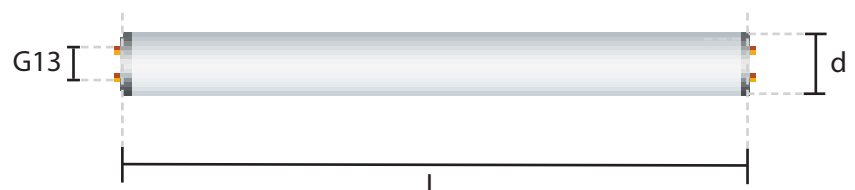

mW/m<sup>2</sup>/nm

